


WG4000

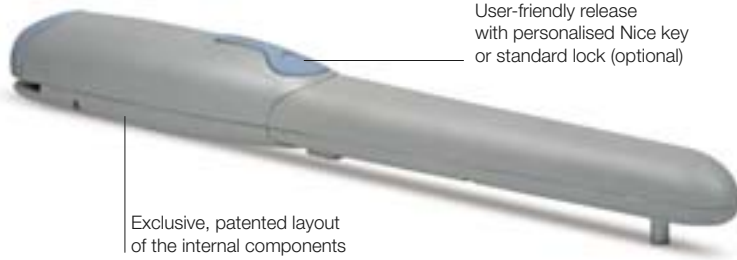

For swing gates with leaves up to 2 m, surface mounted.

Patented layout of the internal components: fewer moving parts **means greater reliability and quiet operation.**

Easy to install: after the gear motor has been assembled, all electrical connections are made from above.

Built-in capacitor.

User-friendly release with personalised Nice key or standard lock (optional).

Pre-assembled, **travel stops** PLA13 on opening.

A400 control unit: for 2 motors, microprocessor logic, with obstacle detection system, IP55 case. Only for Wingo.




The kit contains:

WG4000 2 surface-mounted electromechanical gear motors, with Nice key release.
FLO2R-S 1 transmitter 433.92 MHz, 2 channels. **A400** 1 control unit A400 with SMXI plug-in receiver.
MOF 1 pair of photocells for outdoor installation. **MOSE** 1 key selector switch for outdoor installation.
MLT 1 flashing light with integrated aerial. **PLA13** 2 travel stops for opening manoeuvres. **TS** 1 signboard.


Technical specifications

Code	WG4000
Electrical data	
Power supply (Vac 50 Hz)	230
Absorption (A)	1.5
Power (W)	200
Built-in capacitor (µF)	5
Performance data	
Speed (m/s)	0.016
Force (N)	1500
Work cycle (cycles/hour)	30
Dimensional and general data	
Protection level (IP)	44
Working temp. (°C Min/Max)	-20 ÷ +50
Dimensions (mm)	770x98x95 h
Weight (kg)	6

Installation diagram

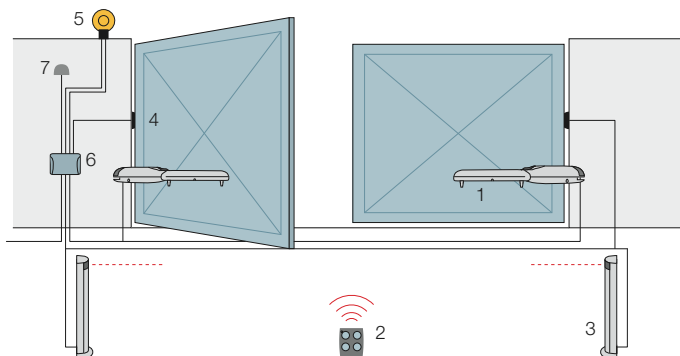

Utilisation limits



1. Wingo 2. Transmitter 3. Photocells mounted on posts 4. Photocells 5. Flashing light 6. Control unit 7. Digital or key switches.